

# 2016



*Celebrating 50 Years  
1966-2016*

# Rule Book

[www.mstpapulling.com](http://www.mstpapulling.com)

## 2016 PULLING SCHEDULE

<u>DATE</u>	<u>LOCATION</u>
May 7	Buckner Test & Tune
May 21	Wentzville, MO LLSS/LPS
May 28	Cole Camp, MO
June 4	Sedalia, MO Dream Factory
June 10	St. Peters MODS
June 11	Adrian, MO
June 18	Nevada, MO
July 1	Warrenton, MO
July 2	Lincoln, MO
July 9	Clinton, MO
July 16	Garnett, KS
July 17	Pleasant Hill, MO
July 22	Montgomery City, MO LPS
July 23	Fort Scott, KS
August 20	Oak Grove, MO
August 27	El Dorado Springs, MO
September 3	Louisburg, KS
September 10	Buckner, MO
September 17	Holden, MO
September 24	Dover, MO

\*\*\*\* This is a tentative schedule  
and is subject to change!!!! \*\*\*\*

## **TABLE OF CONTENTS**

Board of Directors & Officers	1
Bylaws	2
Committees	4
Identification of Pulling Vehicles	5
MSTPA Sanctioned Pulls	6
General Rules	10
General Sled Rules	17
Protest Rules	18
General Vehicle Rules	20
5900 Profield Tractors	23
9500 Profield Tractor	25
9500 Limited Prostock Tractors	27
6400 Limited Light Super Stock Tractors	29
5900 & 7400 Modified Tractors	31
6200 Two-Wheel Drive Truck	35
6200 Prostreet 4x4 Truck	38
6200 Prostock 4x4 Truck	41
Diesel 4x4 Truck	44
10500 Hot Farm	48
Open	49
Drawbar Rules	51
Illustrations	53

## BOARD OF DIRECTORS AND OFFICERS

**Mike McCoy, President**

602 Jackson  
Archie, MO 64725  
816-392-6166

Term: Dec. 2014 – Dec. 2017

**Rita Shepard, Secretary**

602 Jackson Ave.  
Archie, MO 64725  
816-392-4635  
rshepard@mstpapulling.com  
Term: Dec. 2016

**Holly Rayl, Treasurer**

25400 159<sup>th</sup> Rd  
Marshall, MO 65340  
660-631-0144  
hollyray1@yahoo.com  
Term: Dec. 2016

**Danny Brockhaus, Vice President**

1013 NW 250  
Holden, MO 64040  
816-215-9177  
Term: Dec. 2013 – Dec. 2016

**James Bracken**

793 NW UU Highway  
Centerview, MO 64019  
816-305-1098  
Term: Dec. 2014 – Dec. 2017

**Kyle Brockhaus**

14103 Hwy 52  
Windsor, MO 65360  
660-238-4978  
Term: Dec. 2014 – Dec. 2017

**Max Swisegood**

9511 S Outer Belt Rd  
Oak Grove, MO 64075  
816-690-4481  
816-935-3795  
Term: Dec. 2014 – Dec. 2017

**Rick Schibi**

1509 N Ohio  
Sedalia, MO 65301  
660-619-3711  
Term: Dec. 2013 – Dec. 2016

**Dean Hill**

8817 County Road 6003  
Butler, MO 64730  
816-809-2157  
Term: Dec. 2013 – Dec. 2016

**Jason Gudde**

953 SW 2 Hwy  
Holden, MO 64040  
816-405-9547  
Term: Dec. 2013 – Dec. 2016

**Brad Summers**

616 NW 1501 Rd  
Holden, MO 64040  
816-419-1012  
Term: Dec. 2015 – Dec. 2018

**Larry Greene**

458 SW 2 Highway  
Chilhowee, MO 64733  
660-909-8982  
Term: Dec. 2015 – Dec. 2018

**Duane Kipper**

33595 NE Neosho Rd  
Richmond, KS 66080  
785-448-4306  
Term: Dec. 2015 – Dec. 2018

**Ken Summers**

1317 N Lake City Valley Rd  
Buckner, MO 64016  
816-405-4230  
Term: Dec. 2015 – Dec. 2018

## **BYLAWS**

### **Missouri State Tractor Pullers Association Amended February 14, 2006**

#### **NAME**

The name of the organization shall be the Missouri State Tractor Pullers Association.

#### **PURPOSE**

The purpose of MSTPA is to promote the sport of tractor & truck pulling by providing standard rules and assistance to individuals interested in or participating in the sport of pulling as well as to individuals, groups and organizations wishing to conduct such contests.

#### **MEMBERSHIP**

The membership shall consist of individuals desiring to participate in the sport of pulling who have met the requirements of the Association as defined in the MSTPA Rule Book.

#### **OFFICERS**

The Association shall be governed by a Board of Directors consisting of 12 individuals. Four board members shall be elected each year by and from the membership & serve for a three-year term. Officers will be elected each year by the Board of Directors. They are the President, Vice President, Secretary, and Treasurer.

The board can fill any vacancy that may occur during the year. That person shall complete the term of the member they are replacing. The vacancy shall be filled with the member who received the most votes but was not elected to the board at the most recent general election. The board has the discretionary right to review all submitted rule changes and payout increases to ensure the continuity and stability of the organization.

## **MEETINGS**

A Board of Directors meeting may be called at the President's discretion to direct the business of the Association & ensure its continuity and stability. The first 30 minutes of board meetings will be open forum. After that 30 minutes the board will go into closed session

An annual meeting will be held for the purpose of conducting the business of the Association. This includes, but is not limited to, the review of the previous year's business, review and modification of Association rules & election of board members. Time & location shall be at the discretion of the board.

## **AMENDMENT OF BYLAWS**

These bylaws may be amended at any Annual Meeting of the MSTPA by a two-thirds vote, providing that the amendment has been submitted in writing prior to that Annual Meeting.

## COMMITTEES

**Competition Committee:**

Danny Brockhaus

**Protest Committee:**

*Modified, Limited Light SuperstockTractor:*

Dean Hill

Brad Summers

Ken Summers

*Pickup Truck Classes:*

Jim Bracken

Jason Gudde

Kyle Brockhaus

*Profield & 9500 Limited ProstockTractor:*

Rick Schibi

Duane Kipper

Larry Greene

**Overseer:**

Mike McCoy

Max Swisegood

Danny Brockhaus

## IDENTIFICATION OF PULLING VEHICLES

**5900 PROFIELD TRACTORS** are agricultural tractors having stock appearing block, with one injection pump or one carburetor with water injection allowed. This class was originally known as “Out-of-the-Field” or “Hot Farm”.

**9500 PROFIELD TRACTORS** are agricultural tractors with stock-appearing engine block. They may use “A” or “P” injection pump or stock-appearing pump.

**9500 LIMITED PROSTOCK TRACTORS** - 4.1 turbo charger at the inlet tractors, 640 cu. In..

**6400 LIMITED LIGHT SUPERSTOCK TRACTORS** have a stock chassis or its replacement and stock rear end housing. ANY MODIFICATIONS MUST HAVE MSTPA BOARD APPROVAL. The criteria used by the board will be the retention of stock appearance and safety.

**5900 & 7400 MODIFIED TRACTORS** have any combination of engines, transmissions & final drives. Engines are limited to a max. of four (4) naturally aspirated or three (3) blown or single aircraft or single industrial engine. This class was formerly known as the “Hot Rod” class.

**6200 TWO-WHEEL DRIVE TRUCKS** may run any body style with a presentable bed or flat. Trucks newer than 1940 have hoods & fenders. No aluminum blocks.

**PROSTREET, PROSTOCK, & DIESEL 4x4 TRUCKS** have stock frame & body with securely fastened bed & fenders.



## **MSTPA – SANCTIONED PULLS**

The individual or organization sponsoring a sanctioned pull will pay a sanctioning fee of one thousand dollars (\$1000) which will provide:

- One-million dollars (\$1,000,000) per event of commercial racing liability insurance coverage
- Protected pull date
- Track officials
- Services of a board member to monitor the eligibility of all entrants, ensuring that rules are followed.

The sanctioning fee must be mailed to the Treasurer by April 15<sup>th</sup>.

An entry fee will be paid to the Secretary / Treasurer by each contestant at the time of entry or prior to hooking.

Prize money will be six-hundred twenty five dollars (\$625) for 5900 Profield Tractors, to be paid as follows:

- 1<sup>st</sup> place shall receive . . . . \$ 175.00
- 2<sup>nd</sup> place shall receive . . . . \$ 150.00
- 3<sup>rd</sup> place shall receive . . . . \$ 125.00
- 4<sup>th</sup> place shall receive . . . . \$ 100.00
- 5<sup>th</sup> place shall receive . . . . \$ 75.00

Prize money will be six-hundred dollars (\$600) for the 5900 Modified Tractors, to be paid as follows:

- 1<sup>st</sup> place shall receive . . . . \$ 180.00
- 2<sup>nd</sup> place shall receive . . . . \$ 150.00
- 3<sup>rd</sup> place shall receive . . . . \$ 120.00
- 4<sup>th</sup> place shall receive . . . . \$ 90.00
- 5<sup>th</sup> place shall receive . . . . \$ 60.00

Prize money will be eight-hundred fifty dollars (\$850) for the 9500 Profield Tractors, to be paid as follows:

- 1<sup>st</sup> place shall receive . . . . \$ 220.00
- 2<sup>nd</sup> place shall receive . . . . \$ 185.00
- 3<sup>rd</sup> place shall receive . . . . \$ 155.00
- 4<sup>th</sup> place shall receive . . . . \$ 125.00
- 5<sup>th</sup> place shall receive . . . . \$ 90.00
- 6<sup>th</sup> place shall receive . . . . \$ 75.00

Prize money will be one-thousand five hundred dollars (\$1600) for the 6400 Limited Light Superstock Tractors, to be paid as follows:

- 1<sup>st</sup> place shall receive . . . . \$ 375.00
- 2<sup>nd</sup> place shall receive . . . . \$ 325.00
- 3<sup>rd</sup> place shall receive . . . . \$ 250.00
- 4<sup>th</sup> place shall receive . . . . \$ 200.00
- 5<sup>th</sup> place shall receive . . . . \$ 150.00
- 6<sup>th</sup> place shall receive . . . . \$ 125.00
- 7<sup>th</sup> place shall receive . . . . \$ 100.00
- 8<sup>th</sup> place shall receive . . . . \$ 75.00

Prize money will be nine-hundred dollars (\$900) for the 6200 Prostreeet 4x4 Trucks, to be paid as follows:

- 1<sup>st</sup> place shall receive . . . . \$ 260.00
- 2<sup>nd</sup> place shall receive . . . . \$ 220.00
- 3<sup>rd</sup> place shall receive . . . . \$ 170.00
- 4<sup>th</sup> place shall receive . . . . \$ 120.00
- 5<sup>th</sup> place shall receive . . . . \$ 80.00
- 6<sup>th</sup> place shall receive . . . . \$ 50.00

Prize money will be one-thousand eight hundred dollars (\$1800) for the 7400 Modified Tractors, to be paid as follows:

- 1<sup>st</sup> place shall receive . . . . \$ 500.00
- 2<sup>nd</sup> place shall receive . . . . \$ 400.00
- 3<sup>rd</sup> place shall receive . . . . \$ 300.00

4 <sup>th</sup> place shall receive . . . . .	\$ 250.00
5 <sup>th</sup> place shall receive . . . . .	\$ 200.00
6 <sup>th</sup> place shall receive . . . . .	\$ 150.00

Prize money will be one-thousand five hundred dollars (\$1500) for the 6200 Two Wheel Drive Trucks, to be paid as follows:

1 <sup>st</sup> place shall receive . . . . .	\$ 400.00
2 <sup>nd</sup> place shall receive . . . . .	\$ 325.00
3 <sup>rd</sup> place shall receive . . . . .	\$ 255.00
4 <sup>th</sup> place shall receive . . . . .	\$ 200.00
5 <sup>th</sup> place shall receive . . . . .	\$ 140.00
6 <sup>th</sup> place shall receive . . . . .	\$ 80.00
7 <sup>th</sup> place shall receive . . . . .	\$ 50.00
8 <sup>th</sup> place shall receive . . . . .	\$ 50.00

Prize money will be two-thousand dollars (\$2000) for the 9500 Limited Prostock Tractors, to be paid as follows:

1 <sup>st</sup> place shall receive . . . . .	\$ 550.00
2 <sup>nd</sup> place shall receive . . . . .	\$ 450.00
3 <sup>rd</sup> place shall receive . . . . .	\$ 400.00
4 <sup>th</sup> place shall receive . . . . .	\$ 300.00
5 <sup>th</sup> place shall receive . . . . .	\$ 200.00
6 <sup>th</sup> place shall receive . . . . .	\$ 100.00

Prize money will be one-thousand, five hundred dollars (\$1500) for the Diesel 4x4 Trucks, to be paid as follows:

1 <sup>st</sup> place shall receive . . . . .	\$ 490.00
2 <sup>nd</sup> place shall receive . . . . .	\$ 350.00
3 <sup>rd</sup> place shall receive . . . . .	\$ 240.00
4 <sup>th</sup> place shall receive . . . . .	\$ 170.00
5 <sup>th</sup> place shall receive . . . . .	\$ 140.00
6 <sup>th</sup> place shall receive . . . . .	\$ 110.00

Prize money will be two-thousand dollars (\$2000) for the 6200 Prostock 4x4 Trucks, to be paid as follows:

1 <sup>st</sup> place shall receive . . . . .	\$ 500.00
2 <sup>nd</sup> place shall receive . . . . .	\$ 400.00
3 <sup>rd</sup> place shall receive . . . . .	\$ 300.00
4 <sup>th</sup> place shall receive . . . . .	\$ 240.00
5 <sup>th</sup> place shall receive . . . . .	\$ 200.00
6 <sup>th</sup> place shall receive . . . . .	\$160.00
7 <sup>th</sup> place shall receive . . . . .	\$120.00
8 <sup>th</sup> place shall receive . . . . .	\$ 80.00

Prize money will be two-hundred fifty dollars (\$250) for the 10500 Hot Farm Tractors, to be paid as follows:

1 <sup>st</sup> place shall receive . . . . .	\$ 100.00
2 <sup>nd</sup> place shall receive . . . . .	\$ 75.00
3 <sup>rd</sup> place shall receive . . . . .	\$ 50.00
4 <sup>th</sup> place shall receive . . . . .	\$ 25.00

*Sponsors will:*

- Allow two (2) free passes per pulling vehicle
- Provide a minimum of four (4) “pull-off” tractors to tow vehicles unable to operate under their own power
- Provide an ambulance in the pull area during the pull
- Provide a pulling track a minimum of 250 feet in length and 30 feet in width
- Maintain the pulling track by blading & packing throughout the pull.

Points for a sanctioned pull shall be awarded as follows:

1 <sup>st</sup> place . . . . .	13 points	8 <sup>th</sup> place . . . . .	6 points
2 <sup>nd</sup> place . . . . .	12 points	9 <sup>th</sup> place . . . . .	5 points
3 <sup>rd</sup> place . . . . .	11 points	10 <sup>th</sup> place . . . . .	4 points
4 <sup>th</sup> place . . . . .	10 points	11 <sup>th</sup> place . . . . .	3 points
5 <sup>th</sup> place . . . . .	9 points	12 <sup>th</sup> place . . . . .	2 points
6 <sup>th</sup> place . . . . .	8 points	13 <sup>th</sup> place . . . . .	1 points
7 <sup>th</sup> place . . . . .	7 points		

In addition each member will receive 5 show up points and 3 hook points in addition to placing points. Show up points are only given if the show has started. If the show is cancelled prior to start no points will be awarded. If a class has started and gets rained out 8 points will be awarded to all members signed up in said class. If a class has started and cancelled for any reason, class purse will be disbursed equally with pullers entered.

An exception to the distribution of points will be made if a one-day hook puller places. When this happens, the point value of a place will increase by one point for all places below that of the one-day hook puller.

EXAMPLE: A one-day hook puller receives 3<sup>rd</sup> place. 1<sup>st</sup> place – 13 points; 2<sup>nd</sup> place – 12 points; 3<sup>rd</sup> place – 0 points; 4<sup>th</sup> place – 11 points; 5<sup>th</sup> place – 10 points etc. (4<sup>th</sup> place still receives 4<sup>th</sup> place prize money.)

All other vehicles hooking to the sled will get three (3) points.

## GENERAL RULES

1. Drivers membership dues will be sixty dollars (\$60) year round. Vehicle membership prior to January 1st, 2015 will be one hundred fifty dollars (\$150) from January 2nd until April 15th vehicle membership will be a fee of one-hundred seventy five dollars (\$175) after April 15th, 2015 the fee will increase to two-hundred dollars (\$200). Each additional vehicle or driver will be charged sixty dollars each (\$60). All non-members can pay a sixty dollars (\$60) per day hook fee and will receive no points. An associate membership is available for twenty-five dollars (\$25) a year which allows a nonparticipating member to receive all advertisements & mailings.
2. There will be one (1) vote per pulling vehicle, per class with paid membership that pulled 40% of that said class during the current pulling season. All paid members can vote on General Rules. Absentee votes do not count.
3. All class rule changes must be submitted in writing to Danny Brockhaus thirty (30) days prior to the annual meeting to be eligible to be voted on.
4. Pullers under 18 years of age must have a written consent of both parents or legal guardian. Contestants must be at least 15 years of age to participate in any class with legal proof of age with signed insurance consent form notarized with parents signature. This will also include all exhibition hooks.
5. A sanctioned pull will use a dirt track not less than 250 feet in length and not less than 30 feet in width. This track will be maintained & packed with a box blade & roller during the pull.

6. A sanctioned pull will be governed by judges with all decisions final. Judges or board members have the right to stop and/or disqualify any contestant's vehicle that is being operated in an unsafe manner. Any violation of these rules will disqualify the driver & forfeit his/her entry fee.
7. Each puller shall be given two (2) free pit passes per pulling vehicle.
8. Each puller shall have on file with the Secretary a signed, notarized statement that his/her vehicle meets safety requirements for classes in which that vehicle will pull. This statement must be in the Secretary's possession **PRIOR TO THE PULLER'S FIRST HOOK. There will be NO EXCEPTIONS.**
9. Each vehicle may enter two (2) classes, but only once in each class. The Open Class is not included. Vehicles must weigh within 500 pounds of the class weight in which they are entered.
10. All pullers required to wear full fire suit, full faced snell rated helmet, neck brace, gloves, fire shoes or leather boots. All alcohol required to wear head sock and full face helmet with shield.
11. When co-sanctioning with other associations and hooking in a MSTPA class all safety and fire suit protection must be **worn**. NO EXCEPTIONS !!!
12. No alcoholic beverages are to be consumed before hooking to the sled. Judges or board members governing the contest have the right to disqualify.
13. Vehicle speed is limited to six (6) miles per hour in the pit area.
14. No coaching from the sidelines is allowed while the driver is on the track.

15. Unsportsmanlike conduct will NOT be tolerated. Any verbal abuse by a puller or member of his/her party, toward a MSTPA official, MSTPA employee, MSTPA board member, to include sled personnel and persons maintaining the track and/or sponsor/promoter of a pull shall be cause for suspension of said puller & vehicle for a period of sixty (60) days from the date of occurrence.
16. Classes with cubic inch limits are subject to be checked at the Board's discretion. If a puller refuses to be checked, he/she will be disqualified for one (1) year & one (1) day.
17. If a puller is found illegal for weight, fuel or rule for their class, they will forfeit points & money for that pull. If a second offense occurs, he/she will be barred from competition for one (1) year & one (1) day & forfeit points & money for that pull. **Per board discretion.**
18. Pullers must register thirty (30) minutes prior to the start of the pull and pay the \$30 member hook fee in all classes with exception of 5900 Profield and 5900 Modified who will pay \$20. If not a member puller may pay \$60 one day membership fee. If puller calls the secretary, treasurer, or president to sign them up outside extenuating circumstances this will result in a \$10 charge added to hook fee. Failure to sign up on time will result in a twenty dollar (\$20) fine per class, this will result in pulling in the 50% position of your said class or classes. Exceptions will be made when notifying a member of the board to advise of late arrival in the case of breakdowns or problems in transit to/from the pit.
19. At the time of registration, each puller will draw a number to determine the lineup position. If a puller is late in arriving at a pull, he/she must notify the Secretary or Treasurer 30 minutes prior to the start of the pull. If a puller is hooking in 2 classes, they must

sign up for both 30 minutes prior to start time. Otherwise the late fee will be assessed. If contestant needs to scratch from second class a refund will be issued. If you are late in arriving you will be fined the late fee per class pulled and pull in the 50% position of that said class. Exceptions listed above.

20. Each puller has the option to pre-commit in advance for hook fees. Your pulling position will be drawn for you by the person doing signups. If you are late and miss your class or pulling position you have forfeited your money for said pull. Refunds will only be issued by request in writing and after review by the board.
21. The lineup will be posted on the starting end of the track. It is each puller's responsibility to be ready when it is his/her turn. The next two (2) vehicles in the lineup following the one pulling must be ready to hook. Failure to be ready to hook in two (2) minutes after the sled is set will be cause for disqualification. It is the puller's responsibility to notify the track judge of trouble or be disqualified. The judge's decision as to mechanical trouble must be approved by a board member not pulling in the class being pulled and this decision will be final. Puller must return as soon as the mechanical problem is fixed. If a puller abuses this rule, he/she will be disqualified and prize money will NOT be awarded. Puller may receive three (3) hook points.
22. A chalker will be used to mark the "out of bounds" area with the inside of the line to be boundary.
23. Each puller has the privilege of and the responsibility for spotting the sled for both of his/her attempts. An orange cone will be used to mark the location where the sled is to be placed following departure of the previous puller from the starting line.
24. Vehicles must be driven on & off of the track under their own power only by the puller that is signed up to



drive that said vehicle if mechanically able, as determined by the driver.

25. Pulls will start with a tight hitch – no jerking permitted. Puller will be allowed two (2) attempts and one-hundred (100) feet to start the sled.
26. If the puller makes an attempt to stop before one-hundred (100) feet but travels past the mark, a repull will be allowed at the track judge's discretion.
  - a. First puller is the only puller no matter distance to have the option to repull in the 6th measurable position; if the sled is reweighted puller can drop to 6th or last position.
  - b. If puller is the option hook and is disqualified they have the option to come back in the 6th measurable position.
27. If the puller's kill switch falls out on the first attempt, he/she will be allowed a second hook. However, if it falls out on the second attempt, the pull will be measured at that spot.
28. Vehicle will stop immediately upon signal by flagperson. Excessive digging will be not be allowed.
29. A pull is ended by the following:
  - a. Forward motion stops, and the sled chain is unhooked from the vehicle.
  - b. Disqualification – a puller is disqualified for any of the following reasons (i through viii) Puller shall receive only 3 hook points:
    - i. Driver does not remain seated.
    - ii. Vehicle goes outside the pulling strip, which includes the 100-foot starting strip.
    - iii. When a "floating" gate is used, this does not include the area beyond the gate measurement.
    - iv. Driver is not ready to pull when his/her number is called (exceeding the two-minute limit).

- v. Improper safety wear. Must wear the firesuit when pulling onto the track. Helmet must be on and strapped prior to start of pull.
  - vi. Pulling vehicle is left running on the track or staging area with no driver in the seat.
  - vii. Weights fall off of pulling vehicle while hooked to the sled. This is only in the first 300 feet.
  - viii. Riders on or in pulling vehicles.
- c. Disqualification – a puller is disqualified for consuming alcohol before pulling. The puller shall not receive any hook points.
- d. If driver whom signs up is not the driver that pulls down the track this will result in automatic disqualification and no points or prize money will be awarded to said vehicle or driver.
- e. All drivers must sign insurance waiver prior to hooking or disqualification is possible.
30. All pulls made during a contest will be measured. The point of measure will be the front center of the mechanical sled or the reflector for a laser.
31. If a “floating” gate is used, there will be no “out of bounds” past the 300-foot gate.
32. Puller must participate in at least 2/3 of the shows where the vehicle’s class is available to receive end-of-the-year awards, points fund, and sponsorship money. Prize money will be based on the percentage of total hooks in said class for the season being awarded.
33. There will be no “ties” in points awarded. If, at the end of the year, a point tie exists in a class, it will be broken by the puller who has the highest number of wins, 2<sup>nd</sup>, 3<sup>rd</sup>, etc.

34. There will be one jacket & one trophy or plaque awarded per pulling vehicle per class.
35. Any potentially new promoter or member that wishes to speak at the annual meeting may do so but is limited to two (2) minutes.
36. The use of recreational vehicles will be limited to the use of towing trucks or tractors in the pit area or for pulling purposes.
37. The use of head phones will be allowed.
38. All tractors (modified tractors are exception but need to have adequate board approved skid surface) must have front axle skid plates.
  - The skid plates must be mounted inline with each frame rail and extend from the center of the front axle forward (on both sides) equal in strength to frame rail material. Skid plate surface to be a minimum of 4" wide and 12" long with minimum 6" curve when measured from the front most part of rolled edge. The skid plate must be able to support the weight of the front end when checked with a jack. Maximum ground clearance is bottom of front wheel rim not to exceed 4 inches with front tires in normal operating position.
39. There will be a rotation of 3 MSTPA board members responsible at each pull who will stay until the end of the pull to make decisions as needed. These persons will also act as tech crew for event.
40. All board members on duty MUST have a radio on them at all times when a pull is in progress to be contacted if a problem arises or they are needed for a decision from track official, etc.

## **GENERAL SLED RULES**

1. All sleds used must be **NASOA** licensed per classes offered at that event.
2. Race sleds will be used at all pulls.

## PROTEST RULES

All rules pertaining to PROTESTER'S said class including but not limited to weight, hitch, tire size, carburetor, and turbo etc, can be protested for one-hundred fifty dollars (\$150) cash **BEFORE** the winners of the class are announced and the prize money is distributed. This money is non-refundable. The cubic inch rule can be protested at five-hundred dollars (\$500) cash.

### CUBIC INCHES

The PROTESTER must pull in the same class as the vehicle being protested.

The PROTESTER must protest to the secretary/treasurer or board member in charge of the pull & post five-hundred dollars (\$500) cash **BEFORE** the winners of the class are announced & the prize money is distributed.

The PROTESTED must prove that his/her vehicle is legal to pull in that class by the following method:

- a. If protested for cubic inch, vehicle will first be puffed and if fails then step b is mandatory
- b. Mandatory Teardown. The cubic inch limited will not exceed the one percent (1%) tolerance.

If a protest is filed it will be the decision of the 3 board members on duty on how and where the protest will happen. The protester does not have the right to be at a cubic inch tear down. The board will notify the protester of the outcome and that is final.

If the vehicle cannot be checked the day of the protest, the vehicle will be impounded & put under lock & key at

the nearest appropriate building until the check can be made.

If the PROTESTED refused or the vehicle is found to be illegal, the PROTESTED and the vehicle will be barred from competition for one (1) year and one (1) day, and the \$500 cash posted by the PROTESTER will be returned to the PROTESTER.

If PROTESTED proves his/her vehicle to be legal, he/she is awarded the \$500 cash posted by the PROTESTER and will continue in competition.

### FUEL

The PROTESTER must pull in the same class as the vehicle being protested.

When protesting for fuel, the \$150 cash will be paid to MSTPA for the cost of testing. A fuel sample will be collected by a Board Member and tested.

If the report indicates an illegal substance, the PROTESTED and the vehicle will be barred from competition for one (1) year & one (1) day and forfeit points and money for that pull.

Neither the PROTESTOR nor the PROTESTED will receive any monies pertaining to a fuel protest.

Fuel testing may be done at the board's discretion. If a puller is found illegal for weight or fuel, he/she will forfeit points & money for that pull. If a second offense occurs, he/she will be barred from competition for one (1) year & one (1) day and forfeit points and money for that pull.

## GENERAL VEHICLE RULES

1. Contest is limited to rubber-tired vehicles. No tire chains, rear duals with exception of diesel trucks or four wheel drive tractors are allowed.
2. All vehicles will have a tow hook in front to pull the vehicle when necessary. Tow hook may extend in front of weights..
3. All vehicles will have a 2 ½ pound fire extinguisher mounted within easy reach of the driver. A Halon fire extinguisher of equivalent size may be used.
4. All vehicles will have a strong seat, which will be inspected by a safety official.
5. All vehicles will have an area free of all obstructions immediately above the drawbar six (6) inches wide and 12 inches high.
6. Use of gravity-altering fuels is NOT allowed in all classes with exception of 6200 Prostreet 4x4. (e.g., oxygen, nitrous oxide, nitro methane, etc.)
7. All vehicle throttles, will push forward for “open” position & rearward for “idle” position. All throttle cables will be solid with no exposed cable. All vehicles will have a return-to-idle spring on the throttle.
8. Drawbars will be stationary in all directions and must be painted bright orange. (See drawbars rules in the back of the **MSTPA Rule Book**).
9. Weights will not interfere with sled or chain.
10. All blower belts will be shielded on top & sides with 1/16 inch steel or 1/8 inch aluminum.

11. All blowers will have an approved blower restraint with four separate straps.
12. All vehicles with turbo & no muffler will have two (2) 3/8 inch bolts in the exhaust, as close to the elbow as possible at 90 degree angles, and no farther apart than two (2) inches.
13. All vehicles running cast iron harmonic balancers must shield them 360 degrees with ¼ inch steel no more than one (1) inch away, with a minimum of two (2) ears each, extending one (1) inch in front of the hub. All others must have retainer tabs.
14. All vehicles will have an approved kill switch or air shut-off to be attached to the pulling sled without restraint and will be checked at the board's discretion.
15. All vehicles will have a working neutral safety switch to allow vehicles to start only in "neutral" or "park".
16. All vehicles, except Four-wheel Drive Trucks, will be equipped with "wheelie bars," to: (1) be constructed to conform to rules & chart in the back of the MSTPA Rule Book; or (2) use a five (5) inch by five (5) inch solid steel or aluminum roller mounted with a ¾ inch grade eight (8) bolt that will not turn with the roller. It must be strong enough to support the weight of the vehicle.
17. All Two-wheel Drive Trucks & Modified Tractors with injected engines will have dual return-to-idle arms and springs on all injection and butterfly shafts.
18. All tractors will be equipped with individual workable, rear-wheel brakes.
19. All tractors will have wide front ends.



20. All tractors will have fenders which will support the weight of the driver and protect him/her from contact with the tires.
21. All tractors will be equipped with a five-point harness and have a "roll cage" to meet the requirements of the class.
22. All vehicles will have a back-up light, a minimum of two (2) inches in diameter, to be activated by the gearshift lever when the tractor is in "reverse".
23. All tractors must have a clutch blanket or sfi approved clutch can. Anything over 3000 RPM must have a steel fly wheel. Hot Farm Tractors under 3000 RPM can run blanket or steel band.
24. Tractors up to 6,500# will have a roll cage. Minimum of 2 bars 2" diameter material with 90 thousands Chrome Moly or 120 thousands cold steel. All other Tractors over 6,500# must have a minimum of 3 bar cage 2" diameter material with 90 thousands Chrome Moly or 120 thousands cold steel.
25. All cages must be approved by the Board of Directors.
26. Contestants are not allowed to add fuel or change tire pressure after crossing the scales.
27. Only paid members in good standing with MSTPA may drive a self-propelled pulling vehicle to the scales.
28. All diesel tractors are required to have a 3 way dump valve.
29. All turbo charged diesel motors must run a 3/8 cable around motor between 1 & 2 cylinders and fasten with 2 cable clamps and have 4 inches of slack in it.
30. Tractors will have side shields of .060 inch metal extending four (4) inches above and four (4) inches below the crankshaft.

## **5900 PROFIELD TRACTOR CLASS**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight Class:  
5900 lbs. – all tractors turbo and NA  
3000 RPM limit with 1% tolerance  
No RPM limit on NA tractors  
NA gasoline tractors may run one (1) 4- barrel carburetor; will allow gas turbocharged motors with 361 cu in or less to run with no rpm limit.  
Allow gas turbocharged motors with 361 cu in or less to run mechanical fuel injection, NO electronic fuel injection.  
18.4x38 max. tire size  
A 361 cubic inch limit on turbo tractors  
650 C.I. max. limit on NA tractors  
Must run a minimum of 2 bar cage  
Sheet metal needs to be in the family of the tractor  
Any ag motor with like brand ag rear end

### **NO TOLERANCE WILL BE ALLOWED ON TIRE SIZE**

2. All tractors will be equipped with a five-point harness and have a “roll cage”. (see General Rules section)
3. Tractors with tires other than sizes listed above will have their tires measured across the lugs with a tape measure to determine if they are legal.
4. Turbo and non-turbo tractors run in the same weight class.

5. Diesel powered tractors can run any injection pump. Maximum size of a P pump. No computerized injection systems.
6. No predators carburetors allowed.
7. Water Injection is allowed.
8. Weights must be secured to the tractor, Rear weights must not be more than 3" maximum behind rear tires. Tractor length is not to exceed 13' from center of rear axle to farthest point forward including weights. Maximum of 6" tow-hook not include in 13' length.

## **9500 PROFIELD TRACTOR CLASS**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight Class is 9500 lbs.
2. Tires will be no wider than 25” or 38” maximum inside diameter. No Puller 2000 tires allowed.
3. RPM limits are as follows: 466 cu in and under are limited to 3500 rpm's, over 466 cu in are limited to 3000 rpm's. NO SPIKE OVERS. At second check if RPM's are over limit or can't be read, puller is disqualified.
4. RPM check will be done by two (2) board members with one checking the throttle while the other uses the tach.
5. Tractors will have a stock block with a cubic inch limit of 640.
6. Tractors may use “A” or “P” injection pump or stock-appearing pump.
7. Water injection is allowed.
8. Exhaust will have two (2) 3/8 inch bolts as close to the elbow as possible at 90 degree angles, no further than two (2) inches apart.
9. Hitch will be 18 inches in length and 20 inches high.
10. Tractors may use a turbo of choice with a standard restriction of 3.00 inches maximum on the air inlet side of the turbo as close to the turbo as possible. The restriction will be readily accessible for a tech check.

11. Hot Farm Tractors in the 9500# Profield Tractor Class with a 2½ inch inlet on turbo and stock-appearing pump are allowed. There is a 500 pound weight allowance. To be reviewed after 3 pulls in order to pull in profiled class. No “P” pumps for the Hot Farm Tractors.
12. Only single-stage, exhaust-driven turbos will be allowed. Turbochargers must be under the hood or completely shrouded with not less than .060 thick steel, except for the inlet exhaust pipes.
13. Hot Farm Tractors having narrow front ends may pull in the Profield Class if all other requirements of the class are met.
14. All tractors will be equipped with a five-point harness and have a “roll cage” to meet the requirements of class. (see General Rules section)
15. No inner coolers or ice boxes are allowed.
16. All tractors must run a steel flywheel.
17. No aftermarket heads, only OEM allowed.
18. When co-sanctioning and other assoc runs 3500 rpm with intercoolers let mstpa 466 cu in and under run 3700 rpm and 467 cu in and up to 640 run 3200 rpm's.

## **9500 LIMITED PROSTOCK TRACTOR CLASS**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight Class is 9500 lbs.
2. Tires will be no wider than 25” or 38” max inside diameter.
3. “P” Pumps & water injection allowed, no alcohol fuel
4. Exhaust will have two (2) 3/8 inch bolts as close to the elbow as possible at 90 degree angles, no further than two (2) inches apart.
5. Tractor may use a turbo of choice. Maximum of 4.1 at the inlet. No MWE groves to be allowed (smooth bore).
6. Must use steel fly wheel. Must have 6 strap clutch safety blankets and all safety equipment required as in the 9700 Profield Class.
7. Must have 3-way fuel shut off.
8. All tractors will be equipped with a five-point harness and have a “roll cage” to meet the requirements of class. (see General Rules section)
9. 9500 Profield Tractors may pull in the 9500 Limited Prostock Tractor class weighing 9700 lbs. but must follow rules for their 9500 Profield class.

10. Tractors will be allowed to run 640 cubic inches. Billet head allowed. Recast or aftermarket heads will have port location same as stock and will have OEM manifold bolt pattern. (must be able to bolt on OEM manifolds)
11. No inner coolers or ice boxes are allowed.
12. Deck plates allowed up to 1.00 thick.
13. Allow superstock tractors to pull in the 9500 Limited Prostock class weighing 8600 lbs.

## **6400 Limited Light Super Stock Tractor**

**All Vehicles Must Conform to  
“General Vehicle Rules”**

Payout: \$1600 per class

8 places: \$375-\$325-\$250-\$200-\$150-\$125-\$100-\$75

Weight: 6400 lbs. -

Up to 361 cubic inch – 1 turbo (intercooler allowed) -  
must use turbo rules 5 and 6 below.

361-410 cubic inch - 1 turbo (no intercooler) - must  
use turbo rules 5 and 6 below.

Up to 315 cubic inch - 2 turbos any size

Weight: 6100 lbs.

Up to 360 cubic inch--2 turbos any size

361-410 cu in--1 turbo with intercooler (must use  
turbo rules 5 and 6 below).

Weight: 6000 lbs.

351 and above cubic inch – 3 + turbos (17 inch  
drawbar)

1. Cylinder head must be a bolt on OEM agricultural-type for that brand engine.
2. No recasted, billet, or aftermarket head allowed.
3. Up to P7100 series pump allowed, only one plunger per cylinder. Diesel and bio-diesel only. No electronically controlled fuel system allowed.



4. No secondary source of fuel (liquid or gas) or oxygen enhancer allowed.
5. Turbo compressor measurement to be measured at the face of the wheel inlet a maximum of 3.0 inches. The wheel may be no larger than this measurement at the inlet. One map width enhancement groove of .200 allowed. Wheel must protrude into housing 1/8 of an inch. Must be no larger than 3 inches on front side of map width enhancement groove. At least 1/8 inch on back side of map width enhancement groove must be no larger than 3.2 inches in diameter.
6. Exhaust outlet is to be no larger than four inches at the face of the exhaust wheel. Exhaust wheel shall be no larger than 4" at its face and taper back from face evenly with no steps.
7. 6400 lb. Gas Tractors will be allowed to run waste gates.
8. No Component tractors allowed
9. Alcohol super stock can run diesel head with spark plugs
10. No overhead cams allowed
11. HP Tires allowed on 24.5 size only for 1 (single) turbo.
12. These rules will be evaluated on a every pull location until competitive balance is accomplished.

## **5900 & 7400 MODIFIED TRACTOR CLASS**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight Classes are:
  - a. 5900 lb. class with weight (all tractors must run 30.5 tires):
    1. 6500 lbs. – single, naturally aspirated
    2. 6100 lbs. – twin, naturally aspirated and single forced induction
    3. 5900 lbs. – single aircraft or single industrial engine, twin forced induction or triple naturally aspirated.
  - b. 7400 lb. class with weight: (all tractors must run 30.5 tires):
    1. 7900 lbs. – single, naturally aspirated
    2. 7600 lbs. – twin, naturally aspirated and single forced induction
    3. 7400 lbs. – single aircraft or single industrial engine, twin forced induction or four (4) naturally aspirated, three (3) blown wedge style heads not over 43% maximum of 871 blower, 1471 Hemi, 2 prochargers, or Superstock Tractor.
    4. 8000 lbs - Diesel superstock tractors.
2. No portion of the tractor will exceed 14 feet forward of the centerline of the rear wheels.
3. Tractors will be equipped with a “dead man” throttle. Foot throttles will have a toe strap.
4. Tractors will have side shields of .060 inch metal extending four (4) inches above and four (4) inches below the crankshaft.

5. Exhaust will be pointed upward.
6. Tractors using an automatic transmission will be equipped with a reverse gear lockout.
7. Automotive type engines using clutches will be equipped with SFI approved clutch housing, pressure plate, flywheel and clutch disc. (Engines used by manufacturers in both automobiles and trucks are classed as "automotive")
8. Automotive transmissions will be covered with a current SFI-approved scatter blanket and secured as specified by SFI.
9. The remaining drive train to the original tractor transmission, together with any multiple engine couplers, will be shielded 360 degrees with 5/16 inch minimum steel or 3/8 inch aluminum to be fastened every six (6) inches or less with a 3/8 inch bolts, grade five (5) or better to be butt-seam welded. Any additional manual transmission or gearboxes will be shielded in the same manner or be covered with a SFI-approved scatter blanket and secured as specified by SFI.
10. The following rules for ***Turbine Engines*** apply:
  - a. Any turbine engine that exceeds 8000 rpm on the output shaft will not be allowed to use a clutch/flywheel assembly, or an automatic transmission.
  - b. Exhaust pipes on turbines must extend a minimum of 6 inches above the top of the exhaust opening.
  - c. Exhaust stack diameter to be no smaller than 1 inch of the engine outlet.
  - d. No turbine engine will be operated beyond military temperature and rpm limits.

- e. Turbine air intakes must be screened with metal screen that has openings no larger than 3/16-in.
- f. Steel turbine engine containment shroud.
  - i. Engines under 1500 hp must have 3/8-inch steel shroud that surrounds the engine.
  - ii. Engines over 1500 hp must have a 1/2-inch steel shroud that surrounds the engine.
  - iii. The steel shroud must extend a min of 5 in. forward and 10 in. aft of the turbine section.
  - iv. The steel shroud must incorporate a minimum of 3/8-inch thick flanges that extend radially inward from the shroud on both ends of the shroud within a maximum of 1 inch of the engine casting.
  - v. A 1/2-inch gap between the engine and the ID of the flange must be maintained for air circulation inside the shroud.
  - vi. The flanges may be scalloped out to clear tubing, accessories, brackets, etc., and may be either rolled edges of the shroud or steel rings attached by welding or riveting to the shroud.
- g. Composite containment shroud system:
  - i. Because the T55 has multiple steel engine casings, the inner portion of the sandwich may be a minimum of .032-inch aluminum for the T55 only.
  - ii. If the sandwich containment is used the following specs will apply:
    - 1. T-53, T-58 and T-55 are required to have 25 layers of Kevlar 29, 328 or 713 weave or current replacement number.
    - 2. T-64 and JFTD-12 are required to have 40 layers of Kevlar 29, 328 or 713 weave or current replacement number.

- iii. Numerous bolts inserted through the three segments (the two metal sheets and the Kevlar) of the sandwich are required.
- iv. An air gap of 1/2-inch must be maintained for air circulation between the engine outer casing and the sandwich.
- v. End flanges that are required for the steel containment shroud are not required when using the Kevlar sandwich.
- h. Two independent overspeed protection devices are required for power turbine wheel(s).
- i. The governor setting must not exceed manufacturer's maximum specifications.
- j. Overspeed shutdown – consists of speed monitor that activates a normally closed solenoid valve located between fuel control and fuel manifold. Trip setting to be low enough to prevent overspeed in event of driveline failure.
- k. No homemade turbine engines allowed as competition engines.
- l. No Lycoming T-55-L-11 or TF-35 engines allowed as competition engines.
- m. Tech inspection at pull to include a function test of the shutdown solenoid without starting the engine.
- n. Turbine engines may start in gear only while hooked to the sled.
- o. Turbine vehicles allowed starter motor onboard, or auxiliary power unit to be carried onboard and running during a competition attempt, but must not be hooked into the drive train during competition attempt.

## **6200 TWO-WHEEL DRIVE TRUCK CLASS**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight Classes is 6200 lbs:
  - a. One (1) Naturally aspirated, automotive type engine
  - b. 541 cubic inch limit with no tolerance
2. Trucks will be no longer than 15½ feet from the center of the rear axle to the most forward position of the truck, but no weight further than 15 feet.
3. Maximum tire size is 18.4x16.1
4. Trucks will have a presentable bed or flat.
5. Trucks newer than 1940 will have hoods and fenders in place. All side doors will be in place.
6. Trucks will run steel, magnesium or aluminum flywheels that meet the following criteria:
  - a. Steel plate or steel billet flywheel will have a tensile strength of 60,000 psi and a yield strength of 40,000 psi.
  - b. Magnesium or aluminum flywheels will meet SFI Spec. 1.1
  - c. **POSITIVELY NO GRAY CAST IRON ALLOWED.**

7. Use of aluminum blocks or sheet metal manifolds will **NOT** be allowed. Allow the use of conventional style aluminum heads. No hemi, no billet. Only modification allowed is porting. No external modifications. Only 2 valves per cylinder. Must have factory OEM port design – i.e. Ford 429 CJ, Chevrolet rectangle port. OEM meaning used in passenger car.
8. Each driveshaft will have a minimum of two (2) steel loops 1/8 inch thick, 1 inch wide, 6 inches (maximum) above and below. If a vehicle has a shaft between the transmission and transfer case no longer than 24 inches, one (1) loop, properly centered, will suffice. Two-piece shafts will have four (4) loops. Planetary drivelines will be shielded 360 degrees with 3/16 inch steel or 3/8 inch aluminum.
9. All driveline u-joints will be enclosed 360 degrees with 1/16 inch steel or 1/8 inch aluminum. Shield will be close enough to the joint to restrain any broken parts. Joint will not be visible from the side, top or bottom.
10. Trucks with engine-driven fan blades will have a fan shroud extending 360 degrees around the blade to be constructed of 1/16 inch minimum steel. Shroud will be no more than one (1) inch from the radiator core at least 1/4 inch past the rear blade.
11. Trucks will be equipped with steel bellhousing and blocksaver plate.
12. Automotive transmissions will be covered with a SFI-approved scatter blanket and secured as specified by SFI.
13. Exhaust will discharge vertically or underneath and straight back.

14. If the battery is inside the cab, it will be safely enclosed and securely fastened down.
15. Braking system will be an adequate, foot-operated hydraulic system.
16. Radiator hoses or water hoses will **NOT** be allowed in the driver's compartment
17. Axle bolts will be covered securely with a 1/16 inch metal shield.
18. Kill switch will be located in the rear of the truck bed and be unrestrained.
19. Weights will not extend farther back than 12 inches from the hitching point.
20. Maximum hitch height is 30 inches and no closer than 18 inches from center of rear axle. At 10 degree or less of drawbar angle. (See drawbar rules)
21. Trucks will have "wheelie bars" which will extend two (2) inches back from the farthest point of the tire, with a five (5) inch square pad on the bottom or a 5x5" solid steel or aluminum roller mounted with a 3/4" grade 8 bolt that will not turn with the roller. This device must be able to support the weight of the vehicle. The bottom of the front tire will not exceed 40 inches above the ground at the highest point.
22. Driver will wear seat belt while pulling.
23. No electronic traction control allowed.
24. No electronics to engage clutch will be allowed.



## **6200 PROSTREET 4X4 TRUCK CLASS**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight Classes are:
  - a. Naturally aspirated engines **ONLY**
  - b. 473 cubic inch limit
2. Tires will be DOT approved and must maintain original tread pattern. Maximum tire size is 33x12.50. **NO BARRED TIRES.**
3. Vehicles will have stock-appearing frame and body. Fiberglass bodies are allowed. Bed with wood or steel floor will be securely fastened to the frame. Bed may be cut out as long as it is covered. **NO** holes in the hood. **NO** body lifts. Hood scoops are allowed, but **CANNOT** be functional.
4. Vehicle will maintain stock wheelbase maximum of 133”, one ton maximum front end with the use of any rear end.
5. Vehicle will be limited to one (1) carburetor. Dominators are allowed.
6. Vehicle will run fuel designated for make of truck. **NO** alcohol.
7. Use of aftermarket fuel injection systems is **NOT ALLOWED.**

8. Trucks will run steel, magnesium or aluminum flywheels that meet the following criteria:
  - a. Steel plate or steel billet flywheel will have a tensile strength of 60,000 psi and a yield strength of 40,000 psi.
  - b. Magnesium or aluminum flywheels will meet or exceed former SEMA standards 1-1.
  - c. **POSTIVELY NO GRAY CAST IRON ALLOWED.**
9. Vehicle will be equipped with SFI-approved bell housing and block-saver plate. Must have shield around the clutch release hole.
10. Vehicle will have O.E.M. transfer case.
11. Vehicle will have O.E.M. cast iron heads and any cast iron blocks. No sheet metal intake manifolds. Use of aluminum heads or Hemi-heads will **NOT** be allowed. Engine location must be no less than 14" from center line of front axles of bell housing flange.
12. Automatic transmissions will have a SFI-approved blanket or shield.
13. Vehicle may run open headers turning back instead of down.
14. All u-joints must be covered 360 degrees with 1/8 inch steel or 3/16 inch aluminum having two (2) steel driveshaft hangers per driveshaft, 1/8 inch thick, 1 inch wide, 6 inches (maximum) above and below. All drive shafts shorter than 24" require one (1) hanger.
15. Vehicle may have solid rear suspension.
16. Vehicle will have factory front bumper. Bumper must be bolted in stock location. Weights will not extend beyond the front bumper.

17. Rear hitch location will be no closer than 36% of the wheelbase to the center of the rear axle and no more than 26 inches in height.
18. Kill switch will be located in the rear center of the truck bed with out restraint.
19. Driver will wear seat belt.
20. May hook in the 6200 Prostock 4x4 class if the 6200 Prostreet is not offered, this will not be counted for points. Puller and vehicle must be a member and have a registered vehicle.

## **6200 PROSTOCK 4X4 TRUCK CLASS**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight Classes is 6200 lbs.:
  - a. Naturally aspirated engines **ONLY**
  - b. 485 cubic inch limit
  - c. Engine will be same make as vehicle
2. Tires will be DOT approved and must maintain original tread pattern. Maximum tire size is 33x12.50. Tires will not track past 50% of front to rear width. **NO BARRED TIRES.**
3. Vehicle will have stock frame. Air bag suspension is not to be controlled from inside the cab.
4. Vehicle will have a 133” maximum stock wheelbase, any body style – including fiberglass with a protective fire wall, one ton maximum front end, any size rear end. No flat bed.
5. Vehicle will be limited to a single “1 piece” carburetor.
6. No alcohol fuel allowed. Q-16 Fuel is allowed.
7. Use of after-market fuel injection systems is **NOT** allowed.
8. Vehicle will be equipped with SFI steel bellhousing and block-saver plate. Must have shield around the clutch release hole.
9. Vehicle may run any transfer case.

10. Vehicle may use any cast iron block not exceeding 4.9 bore spacing. No aluminum blocks. Any after-market head having no more than two (2) valves per cylinder may be used. No hemi-heads. No sheet metal manifolds and no two-pieced or removable top tunnel rams.
  - a. Engine location must be no less than 14" from center line of front axle to front of bell housing flange.
11. Allow functional hood scoops with open back. Hood perforations will be allowed for exhaust only.
12. Exhaust will discharge vertically or underneath and straight back.
13. Trucks will run steel, magnesium or aluminum flywheels that meet the following criteria:
  - a. Steel plate or steel billet flywheel will have a tensile strength of 60,000 psi and a yield strength of 40,000 psi.
  - b. Magnesium or aluminum flywheels will meet or exceed former SFI standards 1.1.
  - c. **POSTIVELY NO GRAY CAST IRON ALLOWED.**
14. All u-joints must be covered 360 degrees with 1/8 inch steel or 3/16 inch aluminum having two (2) driveshaft hangers per driveshaft 1/8 inch thick steel or 3/16 inch aluminum 1 inch wide, six (6) inches (maximum) above and below shaft.
15. All drive shafts shorter than 24 inches require one (1) hanger.
16. Automatic transmissions will have a SFI-approved blanket or shield.

17. The leading edge of the front weights will not extend more than 60 inches in front of the axle centerline.
18. Hitch may be any length, but hook point can not be any closer than 36% of wheel base. No part of hitch can be attached to rear end housing, stem, adjuster, etc. From pivot point of hitch to hook must be on same plane and not to exceed 25 degrees of angle. Angle will be measured on hitch stem, not from point of hook to pivot. Hitch must be secure in all directions. Hitch adjuster must be 12" or less from point of hook. All rear ends must be welded or bolted in all directions to the frame.
19. Kill switch will be located in the rear of the truck bed without restraint.
20. Driver will wear seat belt.
21. The 6200 Prostreet 4x4 trucks will be allowed to hook in this class if the 6200 Prostreet is not offered, this will not be counted for points. Puller and vehicle must be a member and have a registered vehicle.
22. No electronic traction control devices allowed.
23. Weight box must be a minimum of 8" above the ground.

## **Diesel 4x4 Truck Class**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight will be 8000 lbs. for all trucks.
  - a. Turbo (see rule 19)
  - b. May have non factory axles (see rule 16)
2. Weights must be secure and may not extend more than 60 inches from the centerline of the front axle. Weights may be fastened in the rear bed, but are not allowed in the cab of the truck. No tarp straps allowed for any purpose.
3. No passengers allowed
4. Seat belts are required and must be worn while truck is on the track and **DRIVERS SIDE WINDOW MUST BE DOWN.**
5. Interior seats may be removed except for the drivers seat
6. No fuel tanks allowed inside the cab
7. All trucks must be weighted and certified, underhood inspection will be made at that time.
8. Trucks must be safe operating condition
9. The frame and wheelbase is limited to 158". The motor does not have to match brand. The body does not have to match frame. NO Flatbeds. The bed floor may be removed and gutted. If bed is gutted a bed cover must be used (tarp, etc) and a form of tailgate (sheet metal, aluminum, etc. or extended tarp).

10. Adequate brakes are mandatory.
11. The engine must be in the OEM stock location. Maximum of 460 cu in. Engines may be changed to cross factory lines of manufacturing, (cummins may be put in Ford or Chevy) Factory option engines for 1 ton trucks and lighter are only allowed. No aftermarket blocks or heads.
12. Aftermarket transmission and transfer case are allowed.
13. Dual rear wheels are allowed.
14. Rear suspension may be welded.
15. Traction and ladder bars are allowed.
16. Any front or rear axle allowed, no planetaries. All front axles must have coil or leaf springs and must be in stock location. Adjustable front suspension stops must be mechanical. Pneumatic, hydraulic, and electrical adjustable stops are not allowed.
17. The tires must be DOT street tires. No altered, cut, or recap tires allowed. Maximum diameter is 35 x 12.5.
18. Hitch height shall be a maximum of 26". No transfer type hitches allowed. Receivers must be made of solid steel with an oblong shaped hole 3 ¾" long and 3" wide. Hitch must be frame mounted behind the rear axle of vehicle. No more than 18" from center of pivot point on hitch not to exceed 25 degrees for all trucks. No pulling point above truck frame rails with 44" minimum from center of rear axle to hook point. Rear bumper bars are required.



19. 2.6 “ – The compressor wheel must protrude into the 2.6 bore 1/8”. The inlet will be measured using a 2.65” plug and must not be able to enter the inducer bore. A stock map width enhancement (MWE) groove is allowed. No MWE groove will be allowed that has a width greater than .200” All provisions allowing air into the wheel other than via the bore and the MWE groove are prohibited.

OR

3.0” (smooth bore only)– The compressor housing NO LARGER than 3.0” bore. The compressor wheel must protrude into the 3.0 bor 1/8”. The inlet will be measured using a 3.05” plug and must not be able to enter the inducer bore.

20. Aftermarket computer chips and auxiliary boxes are allowed.
21. Water injection (only) is allowed. Alcohol, methanol, propane, Nitrous Oxide and all oxygen extenders are prohibited.
22. The fuel injection pump is limited to any P series injection pump one plunger per cylinder.
23. All trucks must have a three way dump valve (manual) ahead of the injection pump to be operated from the dash panel and must be equipped with a functioning air shut-off. That is operated from the rear of the vehicle. The air shut-off switch must have a 2” ring and be mounted directly above the hitch in the center of the tailgate area.
24. Drive shaft Loops: All trucks must have three round metal loops shielding on each driveshaft (two piece driveshaft will have six metal loops).360 degree loop must be constructed of at least 5/16 inch steel or 3/8 inch aluminum, 3/4” wide or wider and not more than 2” from the shaft in any direction. End loops to be placed no further than 6” from universal joints, with third loop in

center of shaft, or can be a solid tube (3/8" aluminum or 5/16" steel) meeting the above requirements.

25. All trucks will have 360 degree metal shields around the universal joints, 3/8" thick aluminum with 1/8" steel insert or 1/2" aluminum or 5/16" steel. Minimum width 6". The insert must be a minimum of 6" wide. Shield must have a minimum of 2" clearance and a maximum of 4" clearance.
26. Exhaust: may exit thru hood of vehicle and must point upward Two 3/8 inch diameter bolts minimum grade 5 must be placed through the exhaust pipe, 90 degrees from each other, within one inch of each other as close to the turbo as possible.
27. All vehicles are required to have an SFI approved clutch, and flywheel, An SFI approved scatter blanket(s) is required around the bellhousing or SFI approved clutch can.
28. Axle and hub bolt shields required to be minimum of .060" thick. Minimum diameter of axle end and hub bolts to be covered on both front and rear axles. Mounting shield cannot be mounted to axle end or hub bolts. A hole may be installed in the center of front shield so that lock can be operated, so long as hub end or axle bolts are covered.
29. All engines turning 4500 rpm's and higher must be equipped with a harmonic balance or damper meeting SFI spec 18.1 and shielded as stated in general rules.
30. All trucks only allowed 102" maximum track width (outside tire to outside tire).

## **10500 HOT FARM**

### **All Vehicles Must Conform to “General Vehicle Rules”**

1. Weight Class is 10500 lbs.
  - a. Any turbo
  - b. Any cubic inch block
  - c. Any fuel pump
  - d. RPM's not to exceed 20% above factory high idle
2. Speed Limit will be 12.5 mph with 100' track mark speed correction.
3. Tires will be 20.8x38 tires non-cut.
4. No tricycle front ends allowed.
5. Vehicle must have air shut off kill switch and 3 way fuel shut off valve.
6. Vehicle must be equipped with 20" draw bars, Wheelie bars, R.O.P.S and seat belts.
7. This is an entry level class for 12 year olds and older with parents consent.
8. Any vehicle with non-factory front axles must have skids.

## OPEN CLASS

(NO POINTS AWARDED)

### All Vehicles Must Conform to “General Vehicle Rules”

1. Any vehicle that complies with the “General Rules,” “General Vehicles Rules” & “Open Class” rules may pull in this class.
2. Drawbar height will not exceed.
  - a. Tractors – 20 inches
  - b. Two-wheel Drive Trucks **with** blower or turbo – 26 inches
  - c. Two-wheel Drive Trucks **without** blower or turbo – 30 inches
  - d. Prostock Trucks – 27 inches (may change to barred tires if desired)
  - e. Superstock & Modified Four-wheel Drive Trucks – 26 inches

Two-Wheel Drive Truck	6200 lbs.
Blower Two-Wheel Drive Truck	6200 lbs.
Prostreet 4x4 Truck	6200 lbs.
Prostock 4x4 Truck	6200 lbs.
Modified & Superstock 4x4 Truck	6200 lbs.
Profield Tractor	10500 lbs.
Single Blown Modified Tractor	7600 lbs.
All Other Modified Tractors	7200 lbs.
Superstock/6200# Prostock Tractors	6500 lbs.
8700 Prostock Tractors	9500 lbs.
ULSS 20 inch drawbar	7200lbs
Alcohol with aluminum head	7700 lbs.
DSS 20 inch drawbar	8200 lbs.
PS 20 inch drawbar	8500 lbs.
LPS 20 inch drawbar	9600 lbs.
SF 20 inch drawbar	9800 lbs.

ASS 20 inch drawbar  
Alcohol with cast iron head 8000 lbs.  
Two-Wheel Drive 30 inch drawbar  
Naturally aspirated

### ***Abbreviations***

2WD	–	Modified 2WD Trucks
4WD	–	Modified 4WD Trucks
6SS	–	Light Super Stock Tractors
DSS	–	Diesel Super Stock Tractors
MOD	–	Modified Tractors
P4X4	–	Pro Stock 4x4 Trucks
PS	–	Pro Stock Tractors
DB	–	Draw Bar
SF	–	Super Farm
LPS	–	Limited Pro Stock
ASS	–	Alcohol Super Stock
HF	–	Hot Farm

## DRAWBAR RULES



1. Drawbars cannot be shorter or higher than specifications listed below. Drawbar lengths are measured from the center of the rear wheels to the point of the hook.

Class	Drawbar Height	Min. drawbar length from center line of rear axle
Tractors	20"	18"
2WD	30"	18"
4WD	26"	36 percent
Pro Street 4x4	26"	36 percent

2. Drawbars must be rigid in all directions, no movement allowed. Drawbars must have the pivot pin on the same plane as the hitch point and parallel to the ground with in 1 1/2 inches, plus or minus, per foot of length. This formula translates to a legally allowed 10 degree or less of drawbar angle. All drawbars must be parallel to the ground with the exception of 4WD trucks.
3. All truck and tractor classes up to 8200 lbs., regardless of division, must meet the following requirements: drawbar to be a minimum of 2 sq. inches total material (steel) at any point. This will include the area of the pin with the pin removed. Any pin will be minimum of 7/8". Drawbar must be equipped with a steel hitching device not more than 1 1/2" x 1 1/2" square (1 1/2" round stock); and with an oblong shaped hole 3 3/4" long and 3" wide with a tolerance of + or - of 1/8 of an inch.
4. No portion of the vehicle may interfere with sled, chain or hook during a pull or while being hooked or unhooked.

5. An area 5" wide and 12" high immediately above and below the drawbar must be free of all obstructions (including weights, stabilizer bars, and second drawbars) for ease of hooking and unhooking.
6. Vehicles with second drawbars must have their primary drawbar 8" above the second drawbar. Hole in second drawbar must be covered if not in use.
7. Drawbars and wheelie bars are not to be connected.
8. No trick hitches, or cam type rear ends. Drawbar height or distance from center of rear axle cannot change during the pull. Drawbar must be rigid in all directions. All rear ends will be bolted or welded to frame to prevent any movement.
9. The competing vehicle will not be tied down to the tow vehicle through or on the drawbar in any way while in transport.
10. No L-shaped drawbars will be permitted in any division.

# STABILIZER BAR

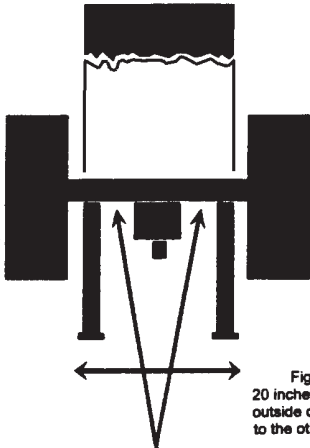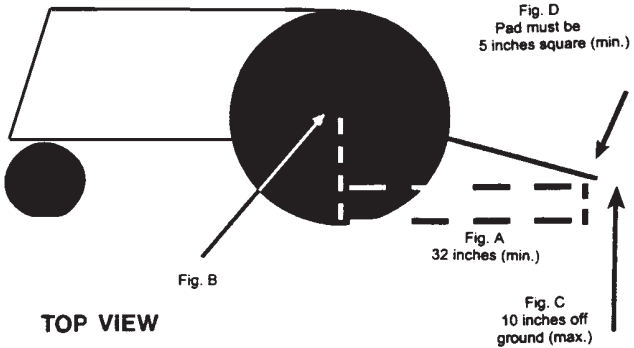

The stabilizer bar will extend a minimum of 32 inches behind a line (Fig. A) drawn from the center of the wheel (Fig. B) to the ground. The stabilizer pad must be no more than 10 inches off the ground (Fig. C). The stabilizer pad must be a minimum of five inches square (Fig. D). A minimum of 20 inches will be allowed from the outside of one pad to the other (Fig. E). Stabilizer bars are not to be mounted in any way to the drawbar.

**NOTE:** The stabilizer bar system must be able to support the weight of the tractor in the heaviest class pulled. Jacking up the pads so tractor is completely off the ground is a good test.

The stabilizer bars and their assembly are in no way to be connected to the drawbar or its assembly.



## NOTES

## NOTES

inside back cover blank

**MISSOURI STATE**

**WESFAR**

**TRACTOR PULLERS ASSOC.**